

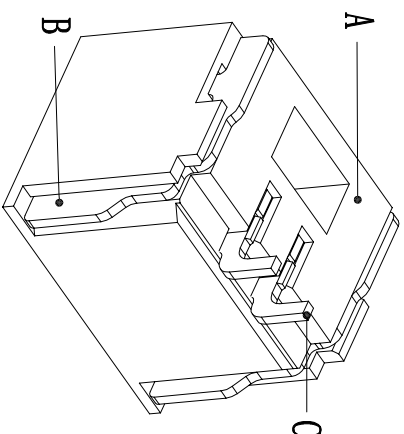
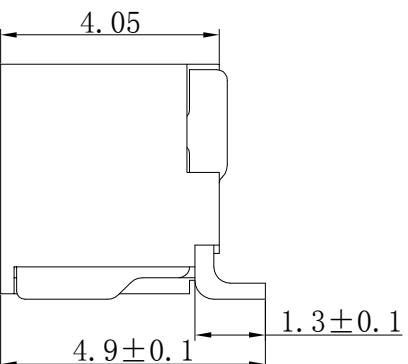
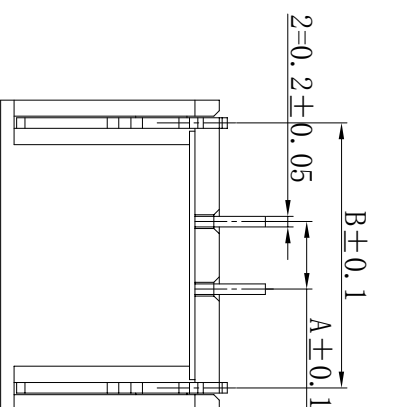


1.25卧式贴片	A	B	C
1.25WT-2P	1.25	4.90	5.75
1.25WT-3P	2.50	6.15	7.00
1.25WT-4P	3.75	7.40	8.25
1.25WT-5P	5.00	8.65	9.50
1.25WT-6P	6.25	9.90	10.75
1.25WT-7P	7.50	11.15	12.00
1.25WT-8P	8.75	12.40	13.25
1.25WT-9P	10.00	13.65	14.50
1.25WT-10P	11.25	14.90	15.75

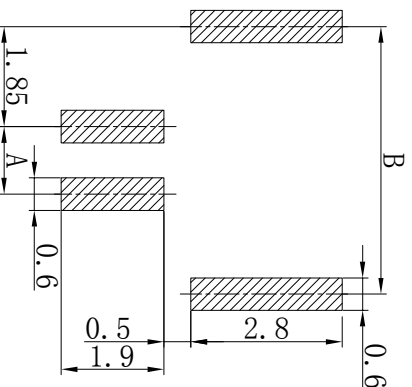

技术指标

1. 塑料表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象；
2. 温度范围： $-25^{\circ}\text{C}^{\sim}+85^{\circ}\text{C}$ ；
3. 额定电流： 1.5V AC DC (等效)；
4. 接触电阻： ≤ 200 毫欧；
5. 绝缘电阻： ≥ 100 兆欧；
6. 耐压： 500V AC/minute .

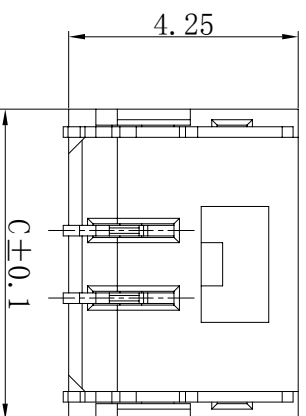

PCB参考图

[illegible]