



规格书

间距(space) : 2.0mm

公差: ± 0.1

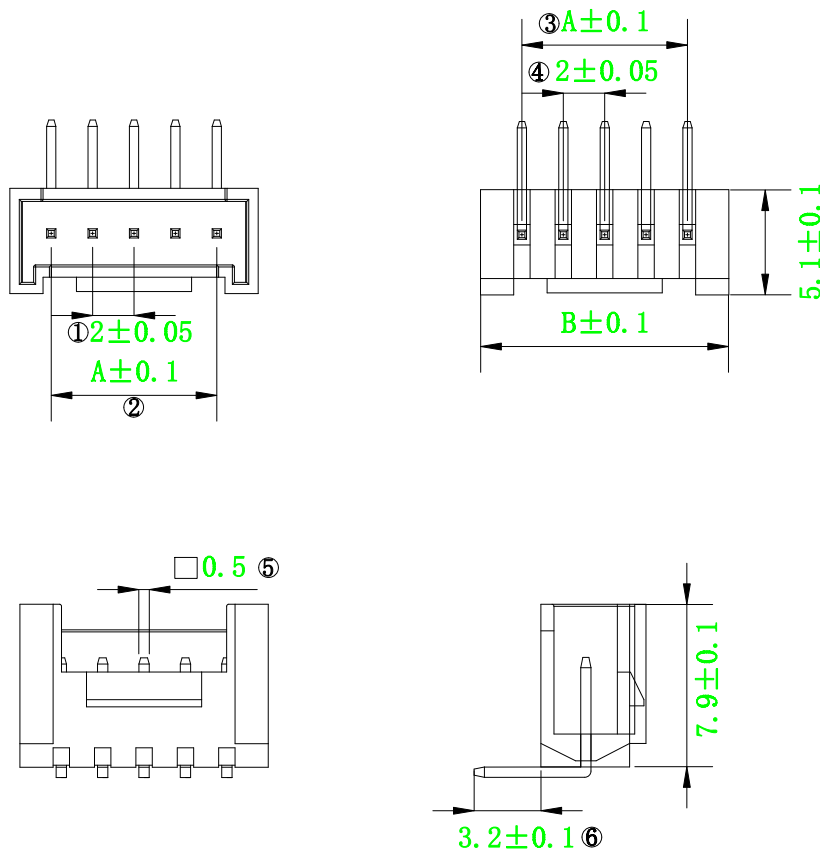

技术参数 SPECIFICATIONS

使用温度范围 (Ambient temperature Range): $-25^{\circ} \sim +85^{\circ}$

适用基板厚度 Applicable PCboard thickness: $0.8\text{mm} \sim 1.6\text{mm}$

额定电压 (Voltage rating): 50V AC, DC

额定电流 (Current rating): 1A

接触电阻 Contact Resistance: $< 0.02\Omega$

绝缘电阻 (Insulation Resistance): $> 500\text{M}\Omega$

耐压 (Withstand Voltage): 500V/1min

材料 (Material)

1. 基座: PA66 UL94V-2(0)

2. 插针: 黄铜

线数 Poles	型号 Type	尺寸Dimensions mm	
		A	B
2	HY-2A	2	6
3	HY-3A	4	8
4	HY-4A	6	10
5	HY-5A	8	12
6	HY-6A	10	14
7	HY-7A	12	16
8	HY-8A	14	18
9	HY-9A	16	20
10	HY-10A	18	22
11	HY-11A	20	24
12	HY-12A	22	26
13	HY-13A	24	28
14	HY-14A	26	30
15	HY-15A	28	32
16	HY-16A	30	34

产品名称

重量 比例

HY-2AW~16AW



温州瀚精电子有限公司
WENZHOU HANJING ELECTRONIC CO., LTD.

工 艺

日 期

2022. 6. 1

共 1 页

第 1 页