
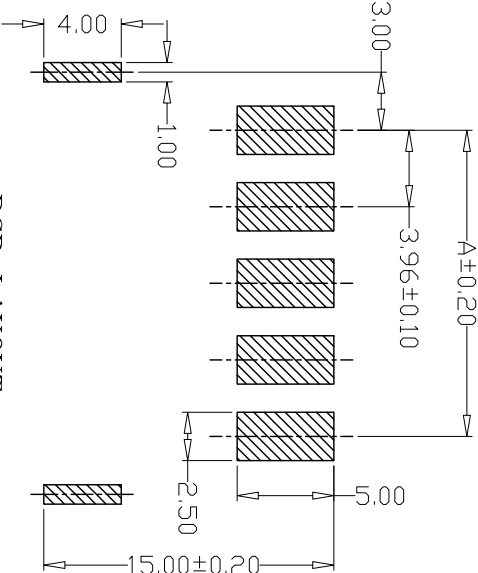
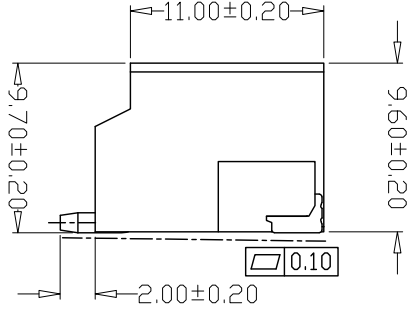
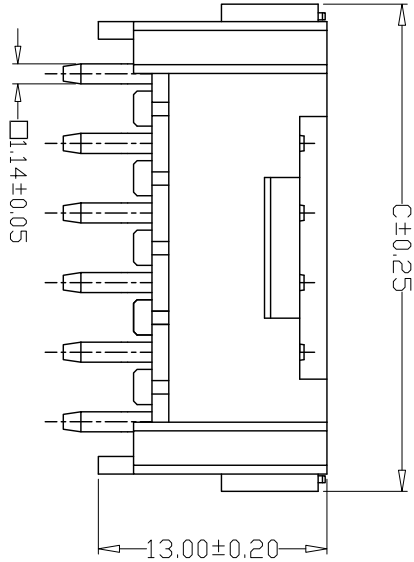
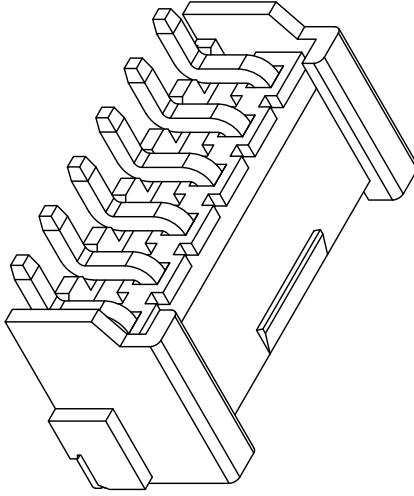


版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

SPECIFICATIONS

- Current Rating: 7A AC, DC
- Voltage Rating: 250V AC, DC
- Temperature Range: -25°C~+85°C
- Contact Resistance: 10mΩ Max
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500V AC/minute
- Material: Wafer PA9T, UL94V-0
- PIN Brass Tin-plated
- Solder tad Brass Tin-plated

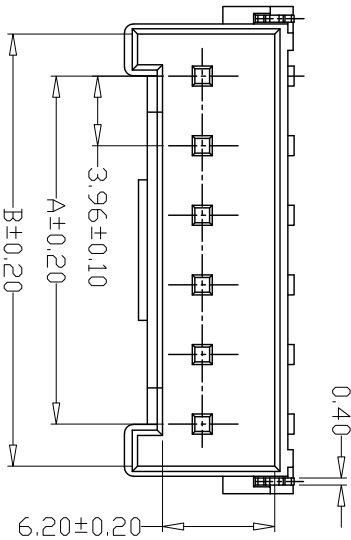

PCB LAYOUT

PIN	尺寸 (mm)		
	A	B	C
-02AWB	3.96	8.68	11.88
-03AWB	7.92	12.64	15.84
-04AWB	11.88	16.60	19.80
-05AWB	15.84	20.56	23.76
-06AWB	19.80	24.52	27.72
-07AWB	23.76	28.48	31.68
-08AWB	27.72	32.44	35.64
-09AWB	31.68	36.40	39.60
-10AWB	35.64	40.36	43.56
-11AWB	39.60	44.32	47.52
-12AWB	43.56	48.28	51.48

GENERAL TOLERANCE		制 图 Mapping	料 号 PART NO.	版 本 REV.	
X.±0.25	X.°±2°			A	
X.±0.25	X.°±1°	审 核 Audit	品 名 TITLE	页 次 SHEET	
X.±0.15	XX°±0.5°	核 准 Approved	客户料号 CUST. NO.		
.XXX±0.10	.XXX°±0.5°		单 位 Units		
			温州瀚精电子有限公司 WENZHOU HANJING ELECTRONIC CO., LTD.		
					