
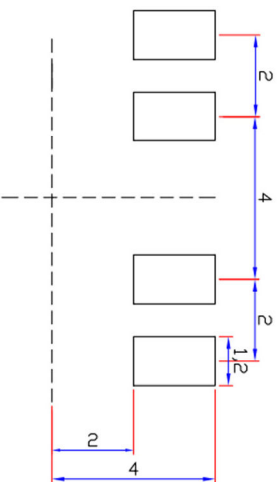

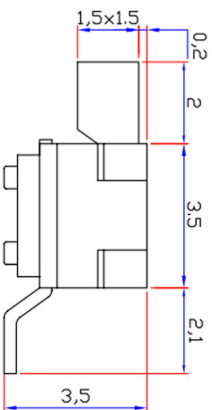


[illegible]

项 目	规 格
额定电压降:	DC12V 0.1A
绝缘电阻:	$\geq 100M\Omega$
耐压强度:	AC250V (50Hz) 1min
环境温度:	-25℃ ~ +70℃
接触电阻:	$\leq 50m\Omega$
动作力:	190gf $\pm$ 50gf
耐湿:	250°
寿命:	10000次

技术参数

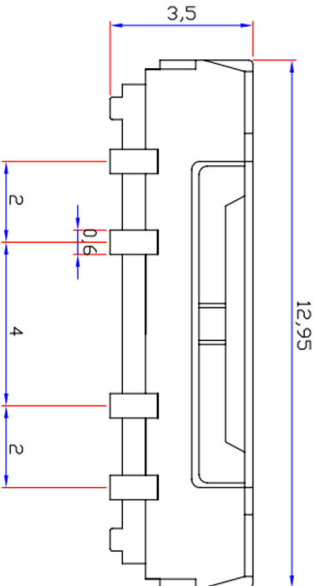

项 目	规 格
额定电压降:	DC12V 0.1A
绝缘电阻:	$\geq 100M\Omega$
耐压强度:	AC250V (50Hz) 1min
环境温度:	-25℃ ~ +70℃
接触电阻:	$\leq 50m\Omega$
动作力:	190gf $\pm$ 50gf
耐湿:	250°
寿命:	10000次

[illegible]